


Product Profile Price Recknor

2022-23



ISO 9001-2015 / ISO 14001-2015

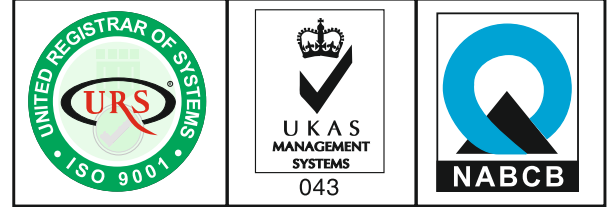

ISO 9001-2015 / ISO 14001-2015

Lighting Engineers under the brand name *Kiran* we are manufacturing and marketing Conventional and LED Luminaries since 30years. Our Firm (Company) is MSME- UDYAM-MH-17-0034393 & NSIC and Certified ISO 9001-2015 & 14001-2015 (environment).

The 5 key advantage of LED Luminaries are - Adaptability for shallow luminaries, better performance, less energy consumption, easy maintenance and environment friendly.

Range of Products

Domestic Luminaries: All Range of Conventional & LED Luminaries.

Decorative Luminaries:

1) **Recessed Mounting :** Luminaries in wide & versatile range suitable for all type of false ceilings, such as POP Aluminium Frame Panels, GRG ceiling & versatile range

2) **Surface Mounting :** Luminaries in wide & Versatile range .

Post Top Luminaries : Luminaries for Garden Gate & Bollard in various shape, sizes and attractive colours.

Street Light Luminaries : Complete range of LED street Light from 15w to 150w and conventional SV/MH and T 5 range.


Industrial Luminaries : Complete range of LED Hibay, Well Glass & Flame Proof.

Flood Light Luminaries : Complete range of LED Flood Light from 20w to 400w in Multi LED and COB and conventional -70, 150, 250, 400w SV/MH.


LED Light : Luminaries of LED for various purposes.

Cleanroom Luminaries : Clean room luminaries for special clean room application in various pharma requirements.

Solar Luminaries : Solar LED Luminaries available for outdoor.

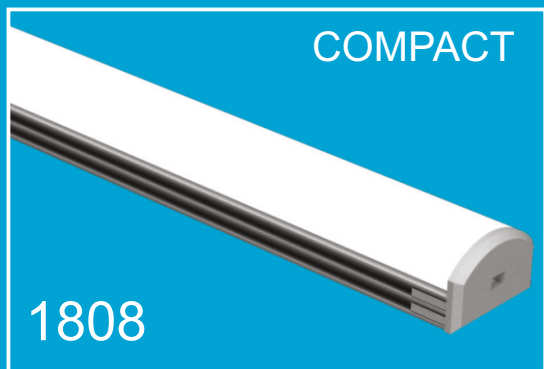


K001

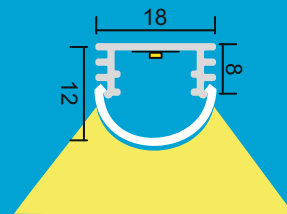


Application:	Available in:	Driver:	Features:
-Cove, Shelves -Office -Retail -Residence, Kitchen	-CC / CV	-Fulham -Osram -Helver	-Available with Translucent Diffuser

Specs:

Wattage	Lumen	Make	Led	CCT	Mounting Type
4.5 W/ ft	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Surface/Cove

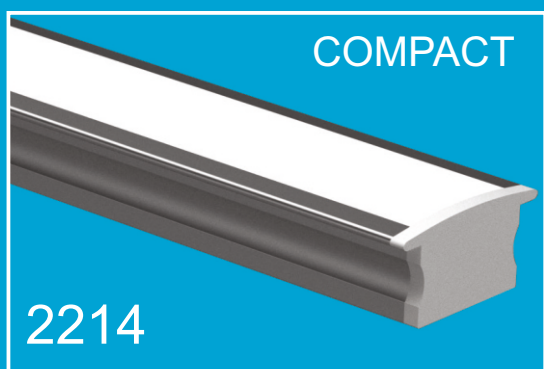


K002

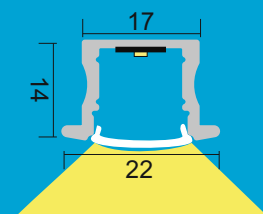


Application:	Available in:	Driver:	Features:
-Wardrobe, Kitchen -Office -Retail -Residence	-CC / CV	-Fulham -Osram -Helver	-Available with Translucent Diffuser

Specs:

Wattage	Lumen	Make	Led	CCT	Mounting Type
4.5 W/ ft	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Surface/Cove

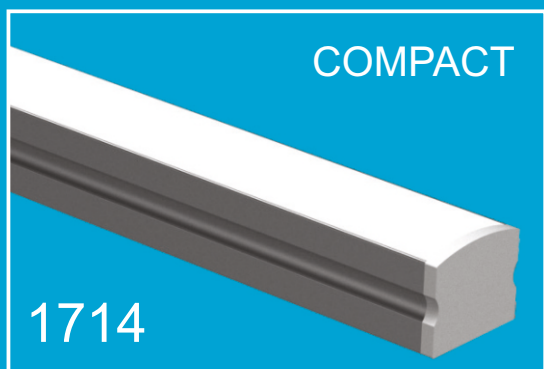


K003

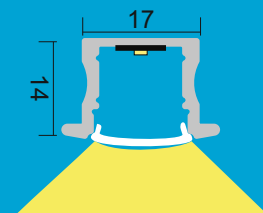


Application:	Available in:	Driver:	Features:
-Cove, Shelves -Office -Retail -Wardrobe, Kitchen -Residence	-CC / CV	-Fulham -Osram -Helver	-Available with Translucent Diffuser

Specs:

Wattage	Lumen	Make	Led	CCT	Mounting Type
4.5 W/ ft	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Surface/Cove

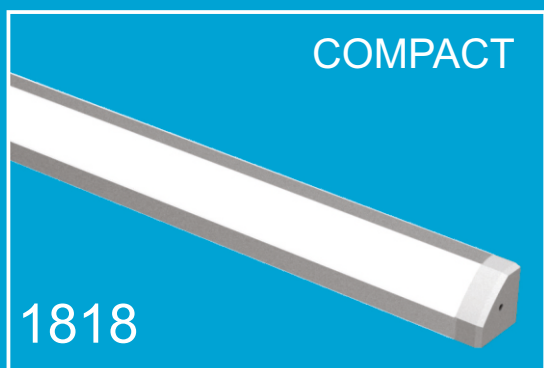




K004

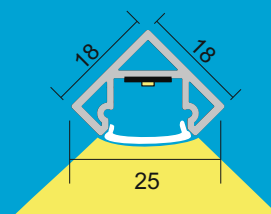

Application:	Available in:	Driver:	Features:
-Wardrobe -Staircase -Retail -Residence	-CC / CV	-Fulham -Osram -Helver	-Suitable For Corners -Available with Translucent Diffuser

Specs:



Wattage	Lumen	Make	Led	CCT	Mounting Type
4.5 W/ ft	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Surface(Corner)

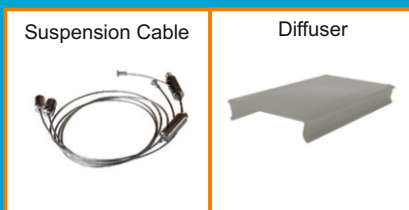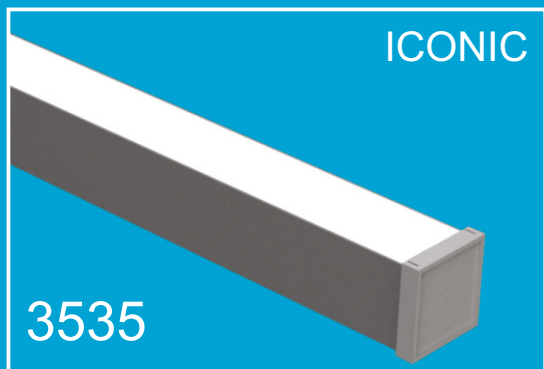

Application:	Available in:	Driver:	Features:
-Office -Retail -Residence	-CC / CV	-Fulham -Osram -Helver	-Long Life -Photobiologically Safe LED'S - Continuous -Row System

Specs:




Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Surface

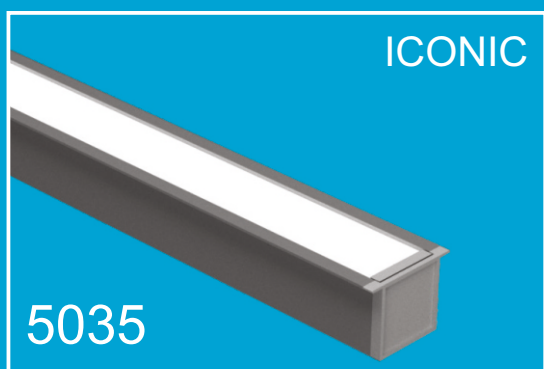

Application:	Available in:	Driver:	Features:
-Office -Retail -Residence	-CC / CV	-Fulham -Osram -Helver	-Long Life -Photobiologically Safe LED'S - Continuous -Row System

Specs:



Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Recess

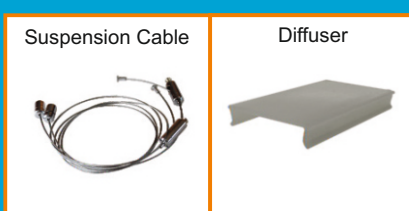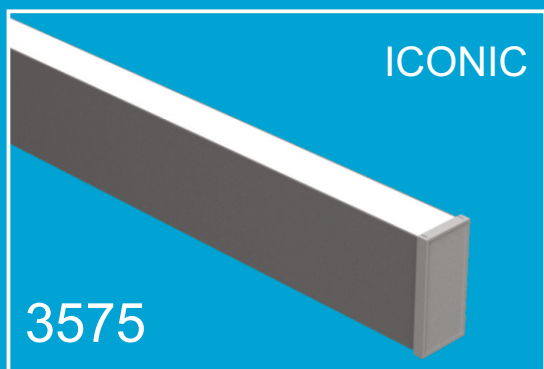

Application:	Available in:	Driver:	Features:
-Office -Retail -Residence	-CC / CV	-Fulham -Osram -Helver	-Long Life -Photobiologically Safe LED'S - Continuous -Row System

Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Suspended

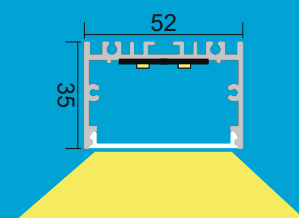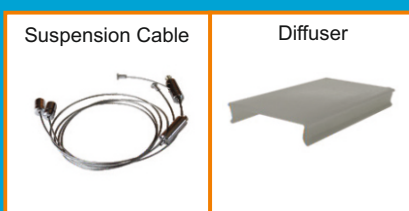

Application:	Available in:	Driver:	Features:
-Office -Retail -Residence	-CC / CV	-Fulham -Osram -Helver	-Long Life -Photobiologically Safe LED'S - Continuous -Row System



Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Surface/Suspended



CLASSIC


K009

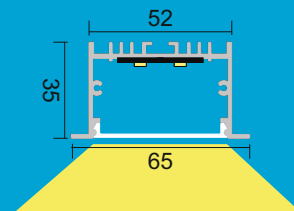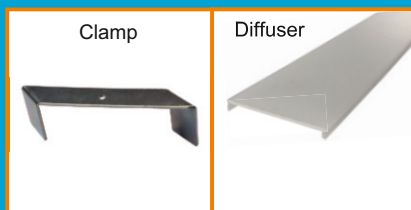

Application:	Available in:	Driver:	Features:
-Office -Retail	-CC / CV	-Fulham -Osram -Helver	-Long Life -Photobiologically Safe LED'S - Continuous -Row System



Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Recess

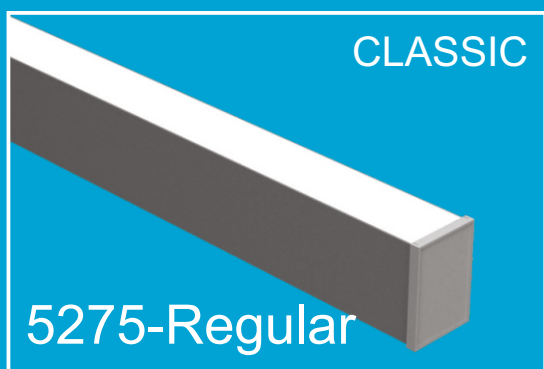

CLASSIC

K010

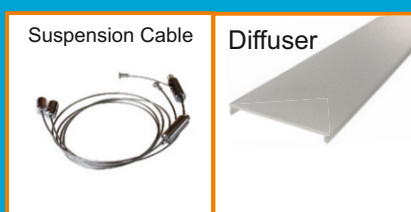

Application:	Available in:	Driver:	Features:
-Office -Retail -Metro, Mall, Airpot	-CC / CV	-Fulham -Osram -Helver	-Long Life -Photobiologically Safe LED'S - Continuous -Row System



Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Suspended



CLASSIC


K011

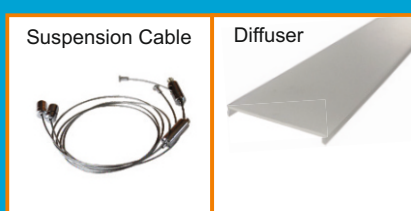

Application:	Available in:	Driver:	Features:
-Office -Retail -Metro, Mall, Airpot	-CC / CV	-Fulham -Osram -Helver	-Long Life -Photobiologically Safe LED'S - Continuous -Row System



Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Suspended

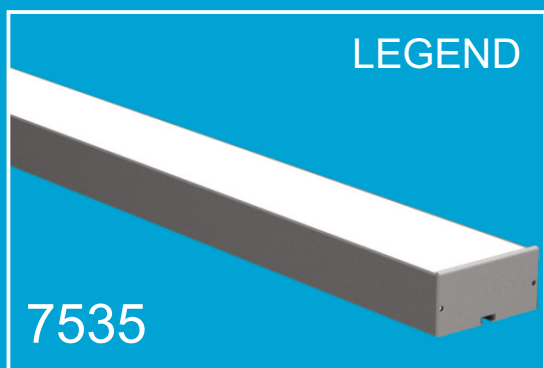

LEGEND

K012

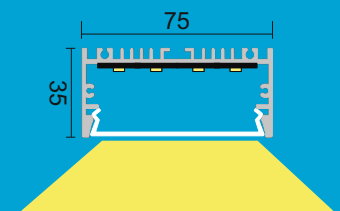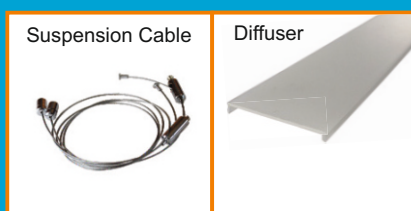

Application:	Available in:	Driver:	Features:
-Office -Retail	-CC / CV	-Fulham -Osram -Helver	-Long Life -Photobiologically Safe LED'S - Continuous -Row System



Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Surface/Suspended



LEGEND


K013

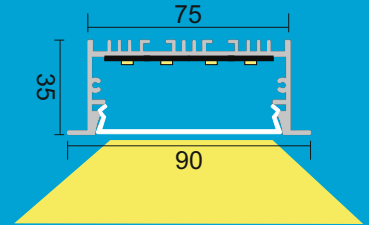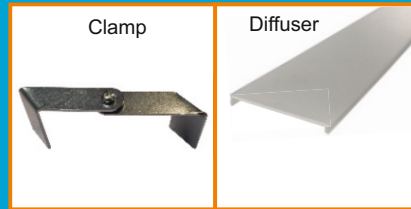

Application:	Available in:	Driver:	Features:
-Office -Retail -Hospital	-CC / CV	-Fulham -Osram -Helver	-Long Life -Photobiologically Safe LED'S - Continuous -Row System



Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Recess

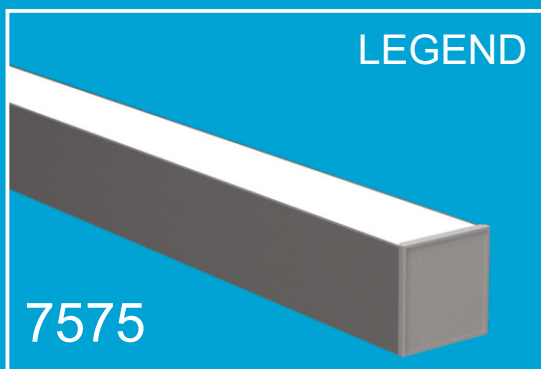

LEGEND


K014

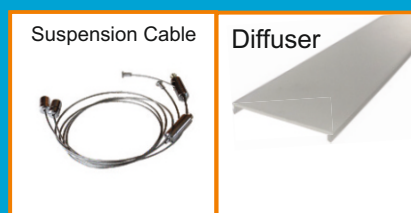

Application:	Available in:	Driver:	Features:
-Office -Retail -Metro, Mall, Airport	-CC / CV	-Fulham -Osram -Helver	-Long Life -Photobiologically Safe LED'S - Continuous -Row System



Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Suspended

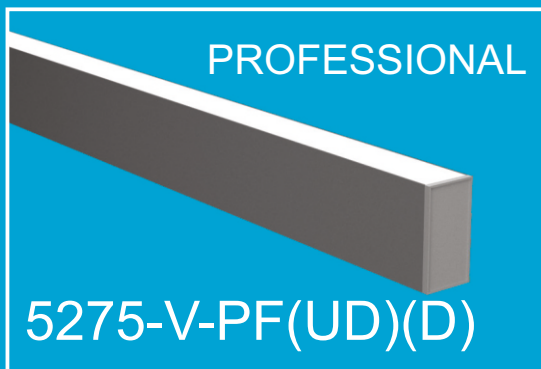

PROFESSIONAL


K015

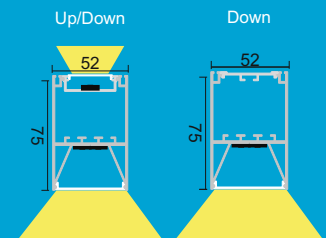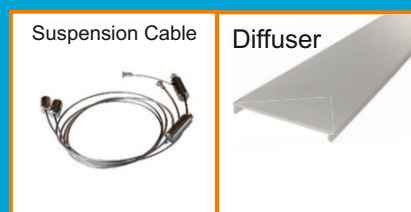

Application:	Available in:	Driver:	Features:
-Office -Retail -Metro, Mall, Airport	-CC / CV	-Fulham -Osram -Helver	-Long Life -Photobiologically -Safe LED'S -Continuous -Row Syatem



Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
20/28/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Suspended

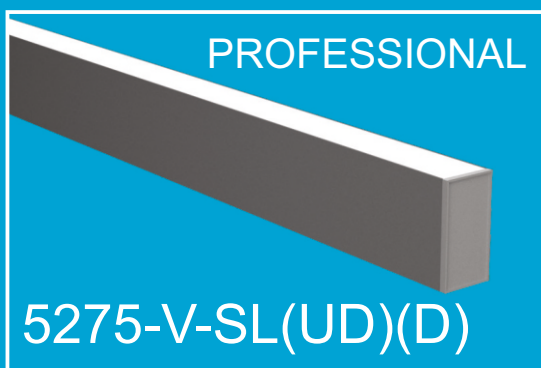

PROFESSIONAL


K016

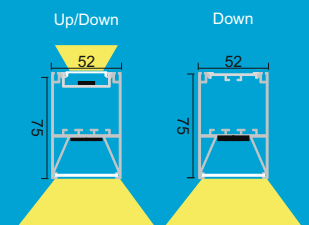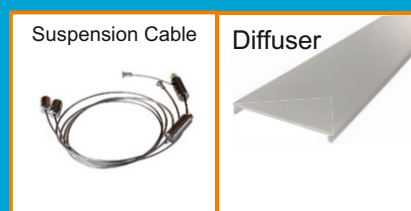

Application:	Available in:	Driver:	Features:
-Office -Retail -Metro, Mall, Airport	-CC / CV	-Fulham -Osram -Helver	-Long Life -Photobiologically -Safe LED'S -Continuous -Row Syatem



Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
20/28/40W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Suspended

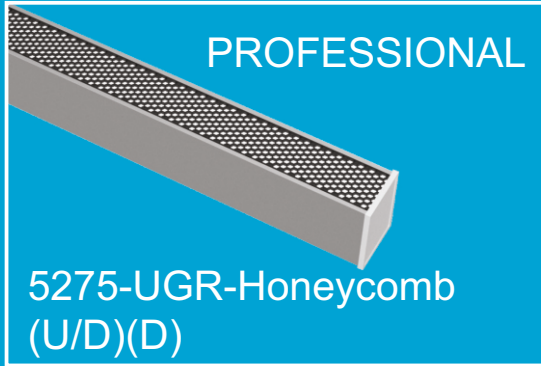

K017



Application:

- Exhibition Halls
- Office Space
- Commercial Sector

Available in:

-CC

Driver:


- Fulham
- Osram

Features:

- UGR <10 -Even Lighting
- Driver Accessible from top
- Direct Indirect Lighting



Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
40W	60lm/W	Bridgelux and SSC	2835	3000K, 4000K, 6000k	Suspended

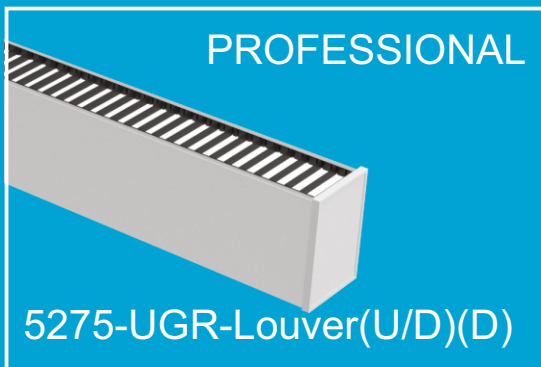

K018



Application:

- Exhibition Halls
- Office Space
- Commercial Sector

Available in:

-CC

Driver:


- Fulham
- Osram

Features:

- UGR <16 -Even Lighting
- Driver Accessible from top
- Direct Indirect Lighting



Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
40W	60lm/W	Bridgelux and SSC	2835	3000K, 4000K, 6000k	Suspended

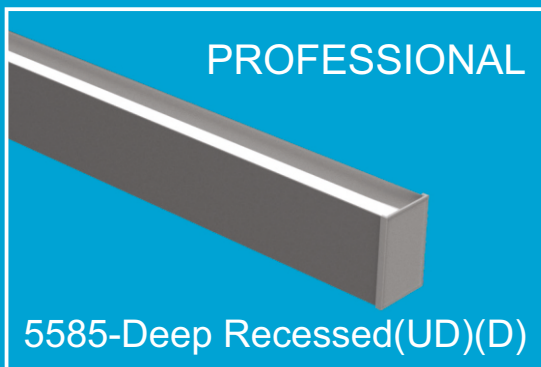

K019



Application:

- Office -Confe. Room
- Retail Outlet
- Commercial space

Available in:

-CC

Driver:


- Fulham -Osram
- Helver

Features:

- UGR <19
- Driver Accessible from top
- Direct Indirect Lighting

Specs:



Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28/40W	105lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Suspended

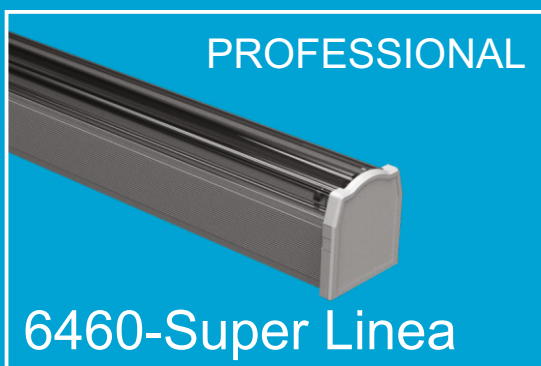

K020





Application:

- Exhibition halls -Car-park, Bus Stops -Office Lighting
- Gym Lighting

Available in:

-CC

Driver:

- Fulham -Osram
- Helver

Features:



- Available in Narrow 60 & 90 Beam
- UGR<19 -Linkable

Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28/40W	105lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Suspended



K021

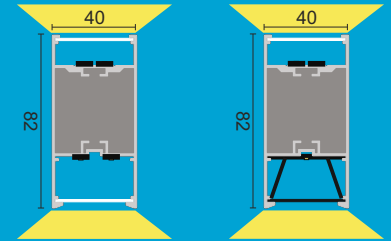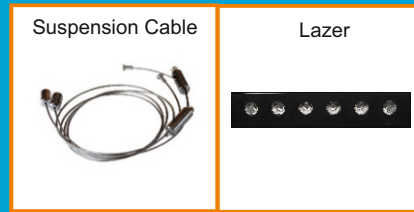


Application: -Exhibition Halls -Office Space -Commercial Sector -Retail Outlets	Available in: -CC	Driver: -Fulham -Osram -Helver	Features: -UGR <10 -Direct Indirect Lighting -Customizable
---	-----------------------------	--	--

Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	105lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Suspended



K022

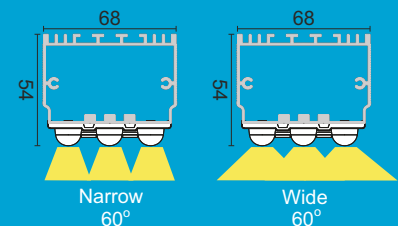


Application: -Warehouses -Mgf. Plants -Retail Outlets -Bookshop -Optical Laboratory Lighting	Available in: -CC	Driver: -Fulham -Osram -Helver	Features: -Available in Narrow 60° Wide 60 -UGR<19 -Linkable
--	-----------------------------	--	--

Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	105lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Suspended




K023

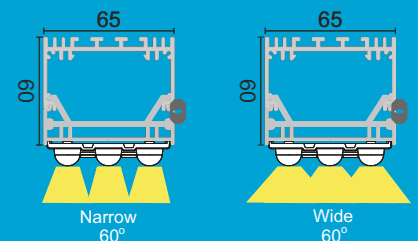



Application: -Warehouses -Mgf. Plants -Retail Outlets -Bookshop -Optical Laboratory Lighting	Available in: -CC	Driver: -Fulham -Osram -Helver	Features: -Available in Narrow 60° Wide 60 -UGR<19 -Linkable
--	-----------------------------	--	--

Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	105lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Suspended

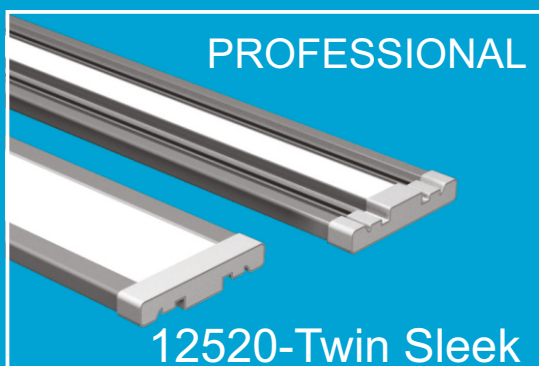

K024

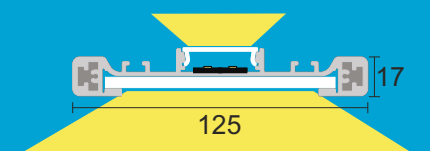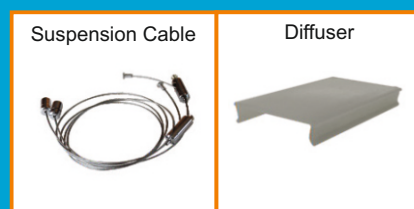



Application: -Office -Hotels -Conference Rooms -Library	Available in: -CC	Driver: -Fulham	Features: -Direct Indirect Lighting -UGR <19
---	-----------------------------	---------------------------	--

Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
42W	100lm/W	Bridgelux, Edison, Everstar	2835	3000K, 4000K, 6000k	Suspended



K025

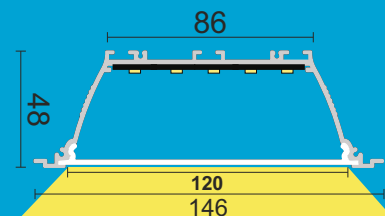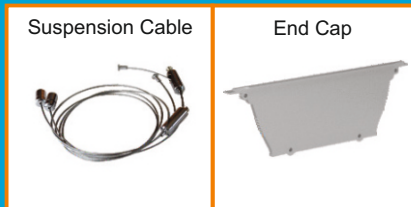



Application: -Office Space -Warehouses -Commerical Sector -Retail Outlets	Available in: -CC	Driver: -Fulham -Osram -Helver	Features: -Suitable for Armstrong Tech Zone Ceiling
---	-----------------------------	---	--

Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
28W/40W	100lm/W	Bridgelux,Edison,Everstar	2835	3000K, 4000K, 6000K	Recessed




K026

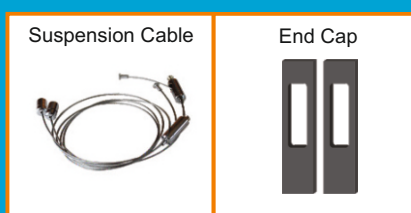

Application: -Office Space -Warehouses -Commerical Sector -Retail Outlets	Available in: -CC	Driver: -Fulham -Osram -Helver	Features: -Long Life -Safe LED's -Photobiologically
---	-----------------------------	---	--


Specs:

Wattage/4ft	Lumen	Make	Led	CCT	Mounting Type
40W	100lm/W	Bridgelux,Edison,Everstar	2835	3000K, 4000K, 6000K	Suspended

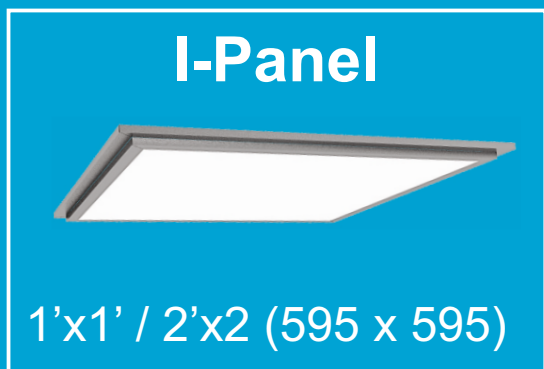


K027

Application:	-Offices & Conference Room -Home & Work Tables -Hallways & Galleries -Work Station
Available in:	-CC/CV
Driver:	-Fulham
Application:	-High Efficiency -Glare Free Light




Specs:

Wattage	Lumen	Make	Led	CCT	Mounting Type
40W	110lm/W	Bridgelux,Edison,Everstar	2835	3000K, 4000K, 6000K	Recess/Suspended

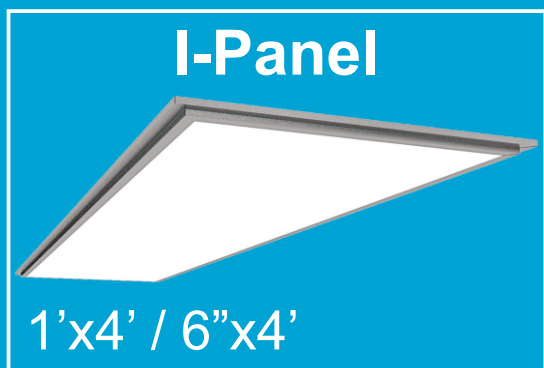


K028

Application:	-Offices & Conference Room -Home & Work Tables -Hallways & Galleries -Work Station
Available in:	-CC/CV
Driver:	-Fulham
Application:	-High Efficiency -Glare Free Light

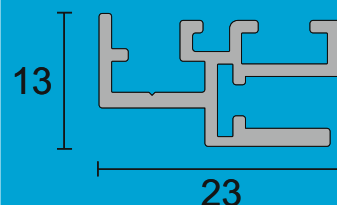


Specs:

Wattage	Lumen	Make	Led	CCT	Mounting Type
40W	100lm/W	Bridgelux,Edison,Everstar	2835	3000K, 4000K, 6000K	Recess/Suspended

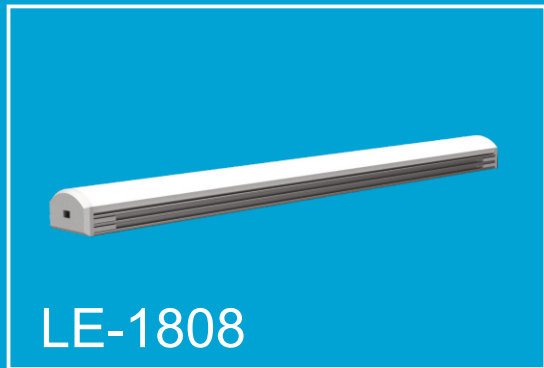

K029

Application:	-Under Cabinet -Kitchen and Wardrobe -Curved milky diffuser for even light distribution -Can be installed using mounting clips.
Specifications :	Dimension : 15mm x 13mm, Wattage : 24V Max 30W, Sensing Distance : 5-8cm, Function : The Switch is mounted at the back of door, profile light will switch on and off while opening and closing the door

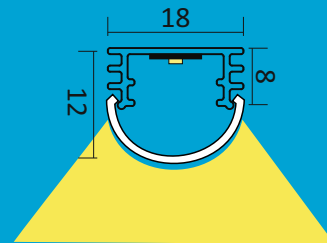


Standard length:

600mm	900mm	1200mm	Customised Length Available
-------	-------	--------	-----------------------------


Specs:

Wattage	Lumen	Led	CCT	Switch Model
4.5/ft	100lm/W	Bridgelux 2835	3000K, 4000K, 6000k	Sensor Friendly

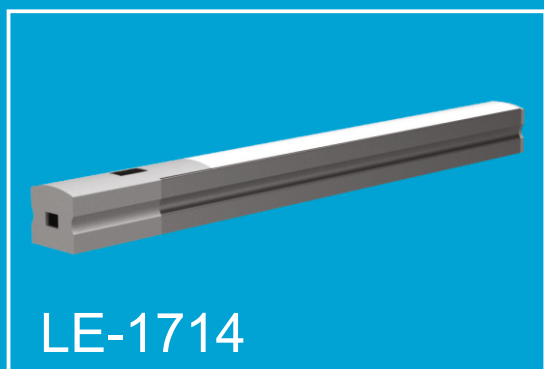

K030

Application:	-Under Cabinet -Wardrobe -Ultra thin design, it can meet various types of furniture board installation - It can also be recessed.
Specifications :	Wattage : DC24V Max 30W Sensing Distance : 5-8cm, Function : Hande - Wave




Standard length:

600mm	900mm	1200mm	Customised Length Available
-------	-------	--------	-----------------------------


Specs:

Wattage	Lumen	Led	CCT	Switch Model
4.5/ft	100lm/W	Bridgelux 2835	3000K, 4000K, 6000k	In Built Sensor

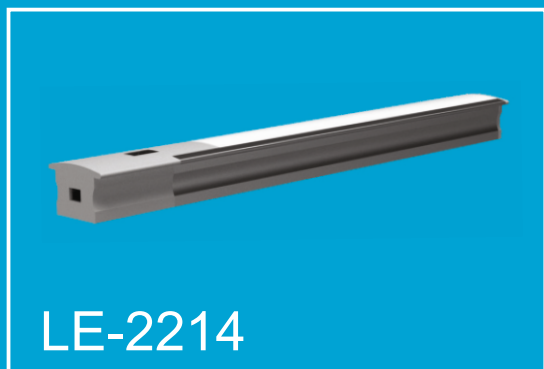

K031

Application:	-Kitchen Cabinet -Showcase -Wardrobe -Avoids too bright and glare
Specifications :	Wattage : DC24V Max 30W Sensing Distance : 5-8cm, Function : Hande - Wave



Standard length:

600mm	900mm	1200mm	Customised Length Available
-------	-------	--------	-----------------------------


Specs:

Wattage	Lumen	Led	CCT	Switch Model
4.5/ft	100lm/W	Bridgelux 2835	3000K, 4000K, 6000k	In Built Sensor



K032

Application:	-Kitchen Cabinet -Showcase -Wardrobe -Avoids too bright and glare
Specifications :	Wattage : DC24V Max 30W Sensing Distance : 5-8cm, Function : Hande - Wave



Standard length:

563mm	863mm	1163mm	Customised Length Available
-------	-------	--------	-----------------------------

Specs:


Wattage	Lumen	Led	CCT	Switch Model
4.5/ft	100lm/W	Bridgelux 2835	3000K, 4000K, 6000k	Sensor Friendly



LE-1818

K033

Application:	-Kitchen Cabinet - Showcase -Drawer -Made for corner application
Specifications :	Dimension : 15mm x 13mm, Wattage : 24V Max 30W, Sensing Distance : 5-8cm, Function : The Switch is mounted at the back of door, profile light will switch on and off while opening and closing the door



Standard length:

600mm	900mm	1200mm	Customised Length Available
-------	-------	--------	-----------------------------

Specs:


Wattage	Lumen	Led	CCT	Switch Model
4.5/ft	100lm/W	Bridgelux 2835	3000K, 4000K, 6000k	Sensor Friendly



LE-3011

K034

Application:	-Kitchen Cabinet - Showcase -Drawer -Designed for corners.
Specifications :	Wattage : DC24V Max 30W Sensing Distance : 1-3 meters, Lights will turn o ff/in 30 secs once shutter closes.




Standard length:

563mm	763mm	863mm	1163mm	Customised Length Available
-------	-------	-------	--------	-----------------------------

Specs:


Wattage	Lumen	Led	CCT	Switch Model
4.5/ft	100lm/W	Bridgelux 2835	3000K, 4000K, 6000k	In Built Sensor



LE-Z Linea

K035

Application:	-Wardrobe -Kitchen cabinet -11mm super fine body design, suitable for any board quality -Light slots into cabinet with direction.
Specifications :	Dimension : 15mm x 13mm, Wattage : 24V Max 30W, Sensing Distance : 5-8cm, Function : The Switch is mounted at the back of door, profile light will switch on and off while opening and closing the door




Standard length:

600mm	900mm	1200mm	1800mm	Customised Length Available
-------	-------	--------	--------	-----------------------------

Specs:


Wattage	Lumen	Led	CCT	Switch Model
4.5/ft	100lm/W	Bridgelux 2835	3000K, 4000K, 6000k	Sensor Friendly

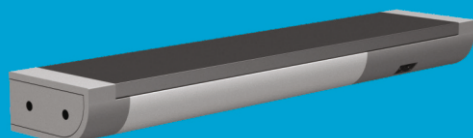

LE-3517

K036

Application:	-Drawer -Flat design to create more space for drawer -Can be used with door trigger sensor.
Specifications :	Sensing Distance : 5-8cm, Function: light will be operational while opening and closing the drawer.









Standard length:

563mm	763mm	863mm	1163mm	Customised Length Available
-------	-------	-------	--------	-----------------------------

Specs:

Wattage	Lumen	Led	CCT	Switch Model
4.5/ft	100lm/W	Bridgelux 2835	3000K, 4000K, 6000k	In Built Sensor

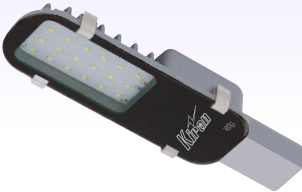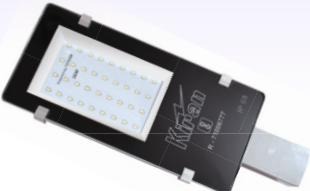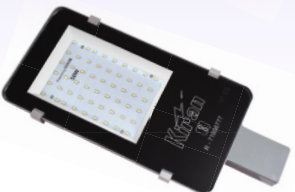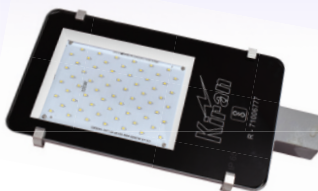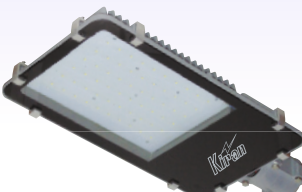Cat. Ref.	Watt.	Description	Price
	K037 SL 15 Watt.	High power LED Street Light (2835 High Power 1Watt. 9v 100mA)	1200.00
ECO	24 Watt. (Supereco)	High power LED Street Light (2835 High Power 1Watt. 9v 100mA)	1400.00
	K038 SL 24 Watt.	High power LED Street Light (2835 High Power 1Watt. 9v 100mA)	1600.00
ECO	36 Watt.		2000.00
	K039 SL 24 Watt. 30/36 Watt. 50 Watt.	High power LED Street Light (2835 High Power 1Watt. 9v 100mA)	1300.00 1600.00 2400.00
BRIDGE			
	K040 SL 60 Watt. 72 Watt. 100 Watt. 120 Watt.	High power LED Street Light (2835 High Power 1Watt. 9v 100mA)	2800.00 3000.00 3800.00 5500.00
ECO			
	K041 SL 120 Watt.	High power LED Street Light (2835 High Power 1Watt. 9v 100mA)	5600.00
ECO	150 Watt.		7000.00
ECO	200 Watt.		8000.00
	K042 SL 24 Watt. 36 Watt. 50 Watt. 100 Watt.	High Power LED Street Light (2835 High Power 1Watt. 9v 100mA)	1200.00 1400.00 2200.00 4000.00
Lens Type			
	K043 SL 20 Watt. 24 Watt.	EESL Model	On Request
EESL			
	K044 SL 20 Watt. 30 Watt.	ABS Model	1200.00 1600.00
ABS PLASTIC			

SOLAR LED STREET LIGHTS

Cat. Ref.	Watt.	Description	Price
K045 SL Solar	20 Watt.	Housing : ABS, Housing color : Grey Power : 40W, Solar Panel: 6V/10W polycrystalline silicon 396 x 212mm Led: 40PCS x1W, Working Time: 10hrs Charging Time:45hrs, IP Grade: IP65 Radar Sensor: Detective distance 8-12m	4000.00
K046 SL Solar	40 Watt.	Housing : ABS, Housing color : Grey Power : 40W, Solar Panel: 6V/10W polycrystalline silicon 396 x 212mm Led: 80PCS x1W, Working Time: 10hrs Charging Time:45hrs, IP Grade: IP65 Radar Sensor: Detective distance 8-12m	5000.00
K047 SL Solar	60 Watt.	Housing : ABS, Housing color : Grey Power : 60W, Solar Panel: 6V/10W polycrystalline silicon 396 x 212mm Led: 120PCS x1W, Working Time: 10hrs Charging Time:45hrs, IP Grade: IP65 Radar Sensor: Detective distance 8-12m	7000.00



LED FLOOD LIGHTS



K048 Back Driver	30 Watt. 60 Watt. 100 Watt. 150 Watt. 200 Watt. 250 Watt.	High Power LED Flood Light (2835 High Power 1Watt. 9v 100mA) Extra Surge Protection 10kv	2000.00 3000.00 5000.00 6500.00 8500.00 9500.00
K049 Down Driver	30 Watt. 50 Watt. 100 Watt. 150 Watt. 200 Watt.	High Power LED Flood Light (2835 High Power 1Watt. 9v 100mA)	1900.00 2200.00 3400.00 4400.00 5500.00
K050 Lens Type	30 Watt. 50 Watt. 100 Watt. 150 Watt. 200 Watt.	High Power LED Flood Light (2835 High Power 1Watt. 9v 100mA)	1900.00 2200.00 3200.00 4000.00 4500.00
K051 Down Driver	250 Watt. 300 Watt. 350 Watt. 400 Watt.	High Power LED Flood Light (2835 High Power 1Watt. 9v 100mA) Extra Surge Protection 10kv	12000.00 16000.00 20000.00 25000.00



Cat. Ref.	Watt.	Description	Price
K052	03 Watt.	Square Panel Light 71(ID) x 80(OD)	350.00
	06 Watt.	105(ID) x 121(OD)	400.00
	09 Watt.	105(ID) x 121(OD)	500.00
	12/15 Watt.	153(ID) x 171(OD)	590.00
	18/22 Watt.	204(ID) x 225(OD)	850.00



K053	03 Watt.	Round Panel Light 70(ID) x 80(OD)	350.00
	06 Watt.	105(ID) x 121(OD)	400.00
	09 Watt.	105(ID) x 121(OD)	500.00
	12/15 Watt.	156(ID) x 171(OD)	590.00
	18/22 Watt.	205(ID) x 225(OD)	850.00



K054	12/15 Watt.	Square / Round Down Light 125mm	1100.00
	18 Watt.	(2835 /.2Watt. 9v 60mA) 150mm	1200.00
	24 Watt.	(Diffuser P.C. Optical Grade) 175mm	1400.00



K055	12/15 Watt.	Center Deep	1100.00
	18 Watt.	(2835 /.2Watt. 9v 60mA)	1200.00
	24 Watt.	(Diffuser P.C. Optical Grade)	1400.00



K056	7 Watt.	Curve Model COB Down Light	1200.00
	12 Watt.		1500.00
	18 Watt.		1800.00



K057	6 Watt.	Deep Cone COB Down Light 35mm	1200.00
	12 Watt.	55mm	1500.00
	18 Watt.	70mm	1800.00



K058	6 Watt.	Delta COB Down Light	1300.00
	12 Watt.		1400.00
	18 Watt.		1900.00




K059	3/6 Watt.	COB Down Light (LX Type)	700.00
	10/12 Watt.	Tilttable Model	800.00
	16/18 Watt.		1200.00
	30 Watt.		1500.00



Cat. Ref.	Watt.	Description	Price
K060	300 x 50 x 50mm 450 x 50 x 50mm 600 x 70 x 50mm 900 x 50 x 50mm 1200 x 50 x 50mm	Pendent Moon Ceiling Light with Aluminium spining with 1.2mm thickness prismatic difuser with Aluminium spining with 2mm thickness acrylicdifuser	On Request



K061	300 x 50 x 50mm 450 x 50 x 50mm 600 x 70 x 50mm 750 x 50 x 50mm 900 x 50 x 50mm 1200 x 50 x 50mm	Pendent Ring Type Ceiling Light with Aluminium spining with 1.2mm thickness prismatic difuser with Aluminium spining with 2mm thickness acrylicdifuser	On Request
------	---	--	------------



K062	1 x 6/10 Watt. 1 x 24 Watt. 2 x 6/10 Watt. 2 x 24 Watt. 3 x 6/10 Watt. 3 x 24 Watt.	Gimbal Down Light	1500.00 1650.00 2200.00 1800.00 2150.00 2600.00
------	--	-------------------	--



GARDEN LIGHTS



K063		10W Pillar Round / Tringular Bollard (300mm / 600mm / 900mm Available)	On Request
------	--	---	------------



K064		10W Fancy Bollard (300mm / 600mm / 900mm Available)	On Request
------	--	--	------------



K065		Hut Type Bollard (300mm / 600mm / 900mm Available)	On Request
------	--	---	------------




K066	20 Watt.	Freedom	1900.00
------	----------	---------	---------




K067	20 Watt.	Glorious	2100.00
------	----------	----------	---------


CLEANROOM LIGHTS




Cat. Ref.	Watt.	Description	Price
K068	(1 x 1 Recess) 24 Watt.	Clean room luminaire with powder coated MS/SS bottom frame acrylic lens. Recess mounting - bottom opening 300 x 300 mm	On Request




K069	(1 x 2 Recess) 24 Watt. 36 Watt. 45 Watt. 60 Watt.	Clean room luminaire with clear sheet and powder coated MS/SS bottom frame. Indoor recess mounting top opening 300 x 600 mm, Top and Bottom Opening	On Request
------	--	---	------------



K070	(2 x 2 Recess) 36 Watt. 45 Watt. 60 Watt	Clean room luminaire with clear sheet and powder coated MS/SS bottom frame. Indoor recess mounting top opening 600 x 600 mm, Top and Bottom Opening	On Request
------	---	---	------------



K071	(1 x 1 Recess) 25 Watt.	Clean room luminaire with powder coated MS/SS bottom frame acrylic lens. Recess mounting - bottom opening	On Request
------	----------------------------	---	------------



K072	(2 x 2 Surface) 36 Watt. 45 Watt. 60 Watt.	Clean room luminaire with clear sheet and powder coated MS/SS Bottom Frame. Indoore Surface mounting. 600 x 600mm	00.00
------	---	---	-------




K073	2 x 2 Slim Panel 36W 48W	2 x 2 Deep draw body with 35mm deep	2800.00 3500.00
------	--------------------------------	-------------------------------------	--------------------

INDUSTRIAL LUMINARIES



Cat. Ref.	Watt.	Description	Price
K074	1 x 18W FTL 2 x 18W FTL 2 x 36W FTL 1 x 36W FTL	Corrosion Proof Street Light Outdoor application injection moulded polycarbonate body & cover, weather proof luminaire suitable for adverse environments. Conforms to IP. Suitable for T8 Led Tube	On Request






Cat. Ref.	Watt.	Description	Price
K075	50 Watt.	UFO Highbay	3200.00
	100 Watt.		4600.00
	150 Watt.		6500.00
	200 Watt.		9000.00
K076	50 / W LED	LED Highbay Economy	3000.00
	100 / W LED		4200.00
	150 / W LED		6000.00
K077	18 Watt	Weather Proof Fitting with LED IP.	3400.00
	36 Watt		4400.00

BULKHEAD



Cat. Ref.	Watt.	Description	Price
K078	10 Watt.	Halfmoon Bulkhead	1000.00
	15 Watt.		1500.00
K079	10 Watt.	Alpha Bulkhead	1000.00
	15 Watt.		1500.00
K080	10 Watt.	Capsule Bulkhead	500.00
	15 Watt.		800.00
K081	10 Watt.	Nova Bulkhead	800.00

Cat. Ref.	Watt.	Description	Price
	K082	30 Watt. (LED Bulb)	1200.00
	K083	9 Watt. 15/18 Watt. 30 Watt. (LED Bulb)	9" 1000.00 12" 2000.00 16" 3000.00
	K084	9/12 Watt. (LED Bulb)	1500.00
	K085	9/12 Watt. (LED Bulb)	1400.00
	K086	T2 1Mtr T2 2Mtr	900.00 1800.00
	K087	T3 1Mtr T3 2Mtr	1000.00 1900.00
	K088	T2 T3	On Request
	K089	26 MM 36 MM	On Request
		Application- Commercial, Residential, Retail, Mall Management	

SMPS LED DRIVER AND LED STRIPS



12V

Sr.	Amp.	Watt	Price
1.	2	24	300/-
2.	3	36	450/-
3.	4	48	600/-
4.	5	60	800/-
5.	6.5	78	1000/-
6.	8	96	1300/-
7.	10	120	1400/-
8.	12	144	1600/-
9.	15	180	1800/-
10.	20	240	2000/-

24V

Sr.	Amp.	Watt	Price
1.	2.5	50	600/-
2.	5	125	800/-
3.	7.5	200	1200/-
4.	10	250	1600/-

48V

Sr.	Amp.	Watt	Price
1.	2	100	000/-
2.	5	250	000/-

LED STRIP LIGHT

Product Description: LED Strip Light 5m | 2835 | 27 Lumens



Color:		
CW	NW	WW
RED	GREEN	BLUE
PINK	AMBER	ICE BLUE
12V-1m	M.R.P. (Incl. of all taxes) (For 5M)	
60 Led	₹ 600/-	
120 Led	₹ 900/-	
180 Led	₹ 1050/-	
204 Led	₹ 1200/-	
240 Led	₹ 1400/-	

PROTECTION

Level of protection (IP)

What is ip? the ip (level of protection) is a two digit number which indicates the protection level provided by the housing of the lighting of the lighting appliance.

The first digit indicates the protection level against water.

1 digit protection against solid bodies			2nd digit protection against liquids		
IP	Tests		IP	Tests	
0		Unprotected	0		Unprotected
1	Ø50 mm 	Protected from solid bodies more than 50 mm. (Eg. Accidental contact with a hand)	1		Protected from vertically falling drops of water (condensation)
2		Protected from solid bodies more than 50 mm. (Eg. Accidental contact with a hand)	2		Protected from vertically falling drops of water (condensation)
3		Protected from solid bodies more than 2,5 mm. (Eg. Tools, wires or similar)	3		Protected from rain water falling at angle up to 60° from the vertical
4		Protected from solid bodies more than 1 mm. (Eg. Small Tools, fine wires...)	4		Protected from water sprayed in all directions
5		Protected from dust (without harmful deposits)	5		Protected from water jetting in all directions
6		Total protection from dust	6		Protected from heavy water similar to heavy seas.
			7		Protected from immersion in water
			8		Protected from prolonged immersion in water at a specified pressure.
The two first digits are defined by the norms UTE C 20 010, IEC 144 and 525 and DIN 40 050			The two first digits are defined by the norms UTE C 20 010, IEC 144 and 525 and DIN 40 050		

Terms and Conditions.

- 1] Technical Specifications are subject to change without prior notice.
- 2] The prices are inclusive of excise duty at the prevalent rates, but exclusive of taxes, octroi, local levies if any which will be charged extra as applicable.
- 3] Any statutory variations at the time of delivery / sale will be borne by the customer.
- 4] All Luminaries prices indicated in the Price Reckoner are without lamp source.
- 5] Prices indicated to be read in conjunction with terms & conditions.
- 6] Lighting Engineers is constantly developing and improving its products for this reason all product descriptions in this brochure are intended as a general guide and we may change some specifications from time to time in the interest of product improvement. Hence specifications and dimensions are subject to change without prior notice.

Warranty Clause

Lighting Engineers undertakes to repair or replace products, at their discretion, which are found to be defective, solely as a result of faulty material and (or) workmanship, within 1 year from the date of purchase. The warranty defines the Company's entire liability and does not cover consequential loss or damage, or reinstallation cost arising from defective product. The Company reserves the right to change/improve the design, without prior notice. In such cases, replacements shall be carried out, with design of the products/accessories prevailing in time. The warranty for the products will be invalidated, if the product is altered or rectified.



LIGHTING ENGINEERS

Address : 6/7, Vora Ind. Est. No.2, Navghar, Vasai (East), Dist. Palghar - 401 210 (India)

Phone : +91 250 2391243 / 2391075 / 2390975

Telefax : +91 250 2390975

E-mail : lightingengineers@rediffmail.com

website : www.lightingengineers.in



ISO 9001-2015 / ISO 14001-2015

Note : data given in this catalogue is subject to variation without notice due to change / improvement in design, materials & process.